


A direction ←

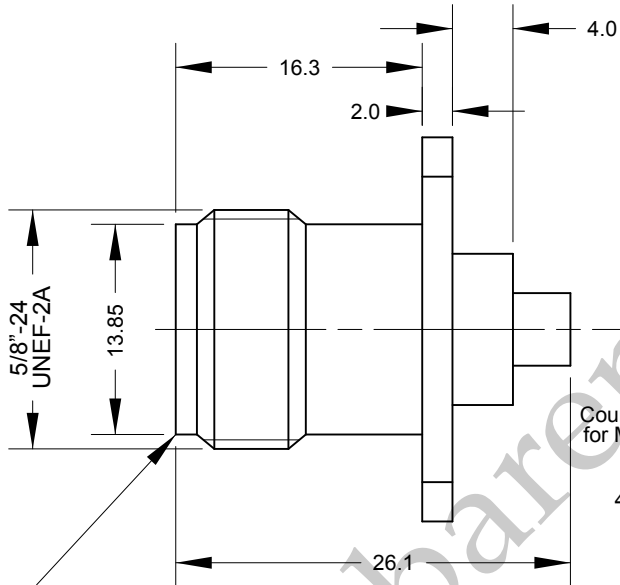

4 x 2.5 R

Countersink for M3.5 x 4
4 x Ø 3.6

18.24 ± 0.05

18.24 ± 0.05

25.40 Sq.

Connector to be supplied with a plastic external dust cap

B direction →

B direction →

4 x 2.5 R

Ø 9.98

Ø 4.8

Countersink for M3.5 x 4

4 x Ø 3.6

18.24 ± 0.05

18.24 ± 0.05

25.40 Sq.

A direction ←

4 x 2.5 R

Ø 10.00

4 x Ø 3.6

18.24 ± 0.05

18.24 ± 0.05

25.40 Sq.

Red Gasket 2.5mm thick

N panel socket for RG402 semi-rigid coax, push fit.

PART	DESCRIPTION
1 Body	Brass, CuSnZn3 Plated
2 Dielectric	Teflon / PTFE
3 Contact Socket	Phosphor Bronze, Gold Plated
4 Gasket	Red Neoprene 2.5mm Thick

BARENCO Ltd

DRAWN Name B. Gell		'N' panel socket for RG402	
Dimensions: mm			
Date	17/06/2020	SIZE	DWG NUMBER
Last Rev.		A4	165027
SCALE	1 : 0.5	REV	-
		SHEET 1 OF 1	

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford, Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400 Email.Sales@barenco.co.uk. Web.www.barenco.co.uk