



Cable : RG178, RG196 & Equivalents

Pin arrangement



Cable preparation details

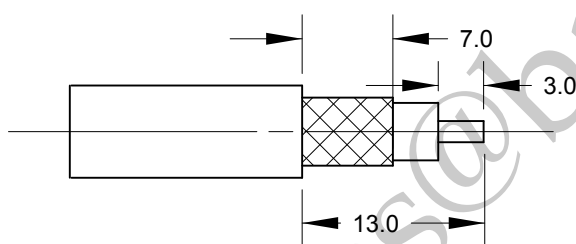

Note:
Supplied with heatshrink for crimp ferrule

Crimping Details

Pin : Solder Only

Crimp Ferrule Hex 0.213" (5.41mm)

Crimp Tool Order Code:-

180455, 180456 & 180458

Cable Construction Specifications

	RG178	RG196
Inner Conductor	0.30mm	0.28mm
Dielectric	0.86mm	0.89mm
Overall Braid	1.30mm	1.37mm
Jacket	1.80mm	2.00mm

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
4	CRIMP FERRULE	BRASS	1	GOLD
3	SHELL/BODY	BRASS	1	GOLD
2	INSULATOR	TEFLON	1	
1	PIN CONTACT	BRASS	1	GOLD

BARENCO Ltd

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name B. Gell

Dimensions: mm

Date 31/12/2020

Last Rev.

SCALE 1 : 0.5

**SMA plug crimp for
RG178 & RG196**

SIZE
A4

DWG NUMBER
170187T

REV -

SHEET 1 OF 1