



Cable : RG58, RG141 & Equivalents

Pin and insulator arrangement

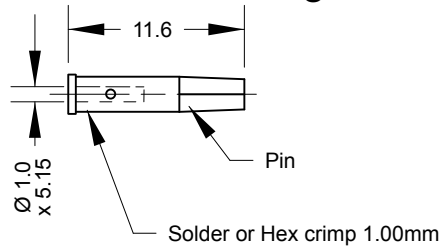

Cable Preparation

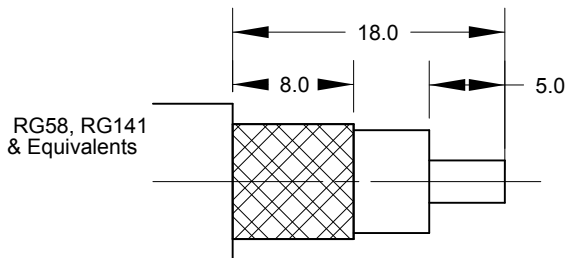

Note.
Supplied with heat shrink for crimp ferrule

Crimping Details

Crimp Pin Hex 0.068" (1.00mm)
Crimp Ferrule Hex 0.213" (5.4mm)

Crimp Tool Order Code:-

180455, 180456 or 180458

Cable Construction Specifications

	RG58.	RG141
Inner Conductor	0.91mm	0.94mm
Dielectric	2.95mm.	2.95mm
Overall Braid	3.30mm	3.30mm
Jacket	4.95mm	4.80mm

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
4	FERRULE	BRASS	1	CuSnZn
3	SHELL/BODY	BRASS	1	CuSnZn
2	INSULATOR	TEFLON	1	
1	CONTACT PIN	BRASS	1	GOLD

BARENCO Ltd

DRAWN Name	B. Gell	FME socket crimp for RG58 & RG141	
Dimensions: mm			
Date	03/08/2020	SIZE	DWG NUMBER
Last Rev.		A4	170180
SCALE	1 : 0.5	REV	-
		SHEET	1 OF 1

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford, Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk