



Cable : RG174, RG316 & Equivalents

Pin and insulator arrangement



Cable Preparation

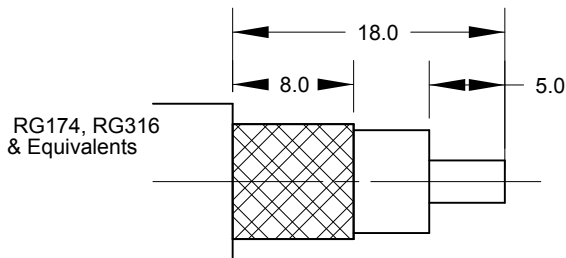

Note.  
Supplied with heat shrink for crimp ferrule

Crimping Details

Pin : Solder Only  
Crimp Ferrule Hex 0.213" ( 5.4mm )

Crimp Tool Order Code:-

180455, 180456 or 180458

Cable Construction Specifications

	RG174	RG316
Inner Conductor	0.48mm	0.53mm
Dielectric	1.52mm	1.53mm
Overall Braid	1.98mm	1.98mm
Jacket	2.54mm	2.50mm

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
4	FERRULE	BRASS	1	CuSnZn
3	SHELL/BODY	BRASS	1	CuSnZn
2	INSULATOR	TEFLON	1	
1	CONTACT PIN	BRASS	1	GOLD

**BARENCO Ltd**

**Barenco Ltd**

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,  
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400  
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

DRAWN Name	B. Gell	FME socket crimp for RG174 & RG316	
Dimensions: mm		SIZE	DWG NUMBER
Date	31/12/2020	A4	170180S
Last Rev.		REV -	SHEET 1 OF 1
SCALE 1 : 0.5			