



Cable : RG178, RG196 & Equivalents

Pin and insulator arrangement



Cable Preparation

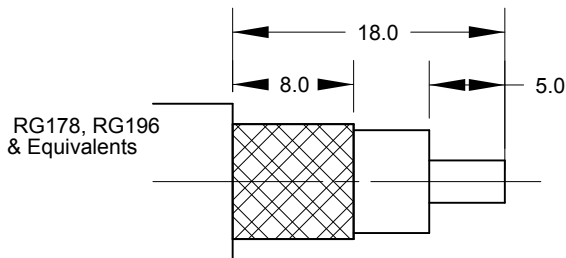

Note.
Supplied with heat shrink for crimp ferrule

Crimping Details

Pin : Solder Only
Crimp Ferrule Hex 0.213" (5.4mm)

Crimp Tool Order Code:-

180455, 180456 or 180458

Cable Construction Specifications

	RG178	RG196
Inner Conductor	0.30mm	0.28mm
Dielectric	0.86mm	0.89mm
Overall Braid	1.30mm	1.37mm
Jacket	1.80mm	2.00mm

CODE	DESCRIPTION	MATERIAL	QTY	FINISH
4	FERRULE	BRASS	1	CuSnZn
3	SHELL/BODY	BRASS	1	CuSnZn
2	INSULATOR	TEFLON	1	
1	CONTACT PIN	BRASS	1	GOLD

Barenco Ltd

Unit 14 Winterbeck Ind. Est. Orston Lane, Bottesford,
Nottinghamshire NG13 0AU. Tel. 0(44)1949 860400
Email.Sales@barenco.co.uk. Web.www.barenco.co.uk

BARENCO Ltd

DRAWN Name	B. Gell	FME socket crimp for RG178 & RG196	
Dimensions: mm		SIZE	DWG NUMBER
Date	31/12/2020	A4	170180T
Last Rev.		REV	-
SCALE	1 : 0.5	SHEET 1 OF 1	